

Stock List



orders@lexproducts.com
800.643.4460

We Deliver The Power



Image	Description
Event Distribution Boxes	
 <p data-bbox="68 772 243 802">DBS200-A4BM2</p>	<p data-bbox="425 541 922 571">cULus Listed Temporary Power Distribution Unit</p> <p data-bbox="425 573 862 602">Environmental Rating: Type 1 (Indoor Use)</p> <p data-bbox="425 604 797 634">Input: (5) 16 Series CAM, 1.5 Tails</p> <p data-bbox="425 636 581 665">Feed Thru: No</p> <p data-bbox="425 667 1507 730">Output: (4) LSC19 19-Pin, 20 Amp, 2-Pole, 3-Wire, 125 VAC receptacles; (3) NEMA 5-20, 20 Amp, 2-Pole, 3-Wire, 125 VAC, duplex receptacle</p> <p data-bbox="425 732 894 762">Outputs Protected by Branch Circuit Breakers</p> <p data-bbox="425 764 1005 793">Rating: 180A, Three Phase (H, H, H, N, G), 208Y/120Vac</p>
 <p data-bbox="68 1104 259 1134">DB100NP-ABB-S3</p>	<p data-bbox="425 873 894 903">cULus Listed Portable Power Distribution Unit</p> <p data-bbox="425 905 889 934">Environmental Rating: Type 3R (Outdoor Use)</p> <p data-bbox="425 936 818 966">Input: (5) 16 Series CAM Panel Mount</p> <p data-bbox="425 968 581 997">Feed Thru: No</p> <p data-bbox="425 999 1330 1062">Output: (15) NEMA 5-20 (Edison), 20 Amp, 2-pole, 3-wire, 125 VAC, straight blade duplex Receptacles, cover doors</p> <p data-bbox="425 1064 894 1094">Outputs Protected by Branch Circuit Breakers</p> <p data-bbox="425 1096 1248 1125">Rating: 100 Amp, Three-phase (H,H,H,N,G), 4-pole, 5-wire, 120/208Y VAC, 60 Hz</p>
 <p data-bbox="68 1430 168 1459">BNB2-3B</p>	<p data-bbox="425 1205 894 1234">cULus Listed Portable Power Distribution Unit</p> <p data-bbox="425 1236 857 1266">Environmental Rating: Type 1 (Indoor Use)</p> <p data-bbox="425 1268 1349 1297">Input: (1) NEMA L21-30, 30 Amp, 4-pole, 5-wire, 120/208Y VAC, locking inlet, panel mount</p> <p data-bbox="425 1299 587 1329">Feed Thru: Yes</p> <p data-bbox="425 1331 1555 1394">Output: (3) NEMA 5-20 (Edison), 20 Amp, 2-pole, 3-wire, 125 VAC, straight blade duplex receptacles, split-wired for (6) 20 Amp circuits, panel mount</p> <p data-bbox="425 1396 894 1425">Outputs Protected by Branch Circuit Breakers</p> <p data-bbox="425 1428 1235 1457">Rating: 30 Amp, Three-phase (H,H,H,N,G), 4-pole, 5-wire, 120/208Y VAC, 60 Hz</p>
Cam Splitter Distribution Box	
 <p data-bbox="68 1854 272 1883">DB400BP-WWW-S3</p>	<p data-bbox="425 1625 857 1654">Environmental Rating: Type 1 (Indoor Use)</p> <p data-bbox="425 1656 922 1686">Input: (5) 16 Series CAM Panel Mount, (BRBWG)</p> <p data-bbox="425 1688 581 1717">Feed Thru: No</p> <p data-bbox="425 1719 1084 1749">Output: (5) Sets of (5) 16 Series CAMs, Panel Mount (H,H,H,N,G)</p> <p data-bbox="425 1751 1026 1780">Rating: 400 Amp, Three-phase (H,H,H,N,G), 120/208Y VAC</p>

Image Description

Motion Picture & Television Distribution



PH100B1-NDC-15CC

cULus Listed Portable Power Distribution Unit
Environmental Rating: Type 1 (Indoor Use)
Input: (1) 100 Amp Stage Pin (Bates), 100 Amp, 2 Pole, 3 Wire, 125 VAC inlet, panel mount
Feed Thru: Yes
Output: (5) NEMA 5-20, 20 Amp, Single Phase, 2 Pole, 3 Wire, 120 VAC, duplex receptacles
Outputs Protected by Branch Circuit Breakers
Rating: 100 Amp, Single Phase, 2 Pole, 3 Wire (H,N,G), 125 VAC, 60 Hz



PH100W-NDC-15CC-RCAT

cULus Listed Portable Power Distribution Unit
Environmental Rating: Type 1 (Indoor Use)
Input: (1) Stage Pin (Bates), 100 Amp, 2-pole, 3-wire, 125 VAC inlet, panel mount
Feed Thru: Yes
Output: (5) NEMA 5-20 (Edison), 20 Amp, 2-pole, 3-wire, 125 VAC, straight blade duplex Receptacles; (4) USB Type A, 4.2 Amp, 2-pole, 3-wire, 125 VAC 4-port receptacles
Data Input: Wired 5-Pin XLR Inlet, DMX512/RDM
Data Feed Thru: Yes
Data Output: (5) Optically Isolated 5-Pin XLR Receptacles
Outputs Protected by Branch Circuit Breakers
Rating: 100 Amp, Single-phase (H,N,G), 2-pole, 3-wire, 125 VAC, 60 Hz



BEH206L-xxx





Male Plug: (1) Hubbell 100A Stage Pin (Bates) Male (Plug), Black
Female Connector: (1) Hubbell 100A Stage Pin (Bates) Female (Connector), Black
Cable Type: (2) #4 Type SC Black and (1) #6 Type SC Green Cables, Banded
Length: xxx = Length; 25', 50', 100'
Rating: 100 Amp, Single-phase (H,N,G), 2-pole, 3-wire, 125 VAC, 60 Hz

PowerFLEX™ Power Extensions



PE700J-xxx-515

Male Plug: (1) NEMA 5-15, 15 Amp, 2-pole, 3-wire, 125 VAC, straight blade, black
Female Connector: (1) Hubbell 100A Stage Pin (Bates) Female (Connector), Black
Cable Type: (2) #4 Type SC Black and (1) #6 Type SC Green Cables, Banded
Length: xxx = Length; 5', 50', 100'
Rating: 15 Amp, Single-phase (H,N,G), 2-pole, 3-wire, 125 VAC, 60 Hz

Image	Description
PowerFLEX™ Power Extensions	
	<p>Male Plug: (1) Molded 20A 19-Pin Male (Plug), Black NOTE: Six ground contacts are combined through the use of a ground ring to two ground conductors Female Connector: (1) Molded 20A 19-Pin Female (Connector), Black NOTE: Six ground contacts are combined through the use of a ground ring to two ground conductors Cable Type: #12/14 Type TPR, Black Length: xxx = 10', 25', 50', 125' Rating: 20 Amp, 125 VAC, Single Pole, 2-Pole, 3-Wire, NOTE: Maximum when used with 50% diversity of load (in accordance with table NEC 520-44)</p>
<p>EGME-1214-xxx</p>	 <p>Male Plug: (1) powerCON® NAC3FCB, 20 Amp, 2-pole, 3-wire, 250 VAC, locking, grey Female Connector: (1) powerCON® NAC3FPA, 20 Amp, 2-pole, 3-wire, 250 VAC, locking, blue Cable Type: #12/3 Type SJOOW, Black Length: xxx = 5', 10', 15', 25', 50' Rating: 20 Amp, 208 VAC, 2-Pole, 3-Wire</p>
<p>PE700J-xxx-PCN</p>	 <p>Male Plug: (1) powerCON TRUE1® NAC3MX-W-TOP, 16 Amp, 2-pole, 3-wire, 250 VAC, locking, black Female Connector: (1) powerCON TRUE1® NAC3MX-W-TOP, 16 Amp, 2-pole, 3-wire, 250 VAC, locking inline device, black Cable Type: #12/3 Type SJOOW Cord Length: xxx = 5', 10', 15', 25', 50', 100' Rating: 20 Amp, Double-phase (H,H,G), 2-pole, 3-wire, 250 VAC, 60 Hz</p>
<p>PE700J-xxx-TRUE1</p>	<p style="text-align: center;">PowerFLEX™ Data Cable</p>  <p>Male Plug: (1) 5-Pin XLR Male (Plug), Black Cable Type: (2) #22 AWG Twisted Pairs, Braided Shield, Polyurethane Jacket, Heavy Duty, Black Female Connector: (1) 5-Pin XLR Female (Connector), Black Length: xxx = 10', 15', 25', 50', 100'</p>
<p>DMX-5P-xxx</p>	

orders@lexproducts.com
800.643.4460

Contact Information:




Mike Reilly
National Account Manager
Entertainment & Theatrical
Phone: 203-998-1067
Email: MReilly@lexproducts.com




Mark Hovis
National Account Manager
Studio & Film
Phone: 707-791-0596
Email: MHovis@lexproducts.com

Typical Motion Picture System

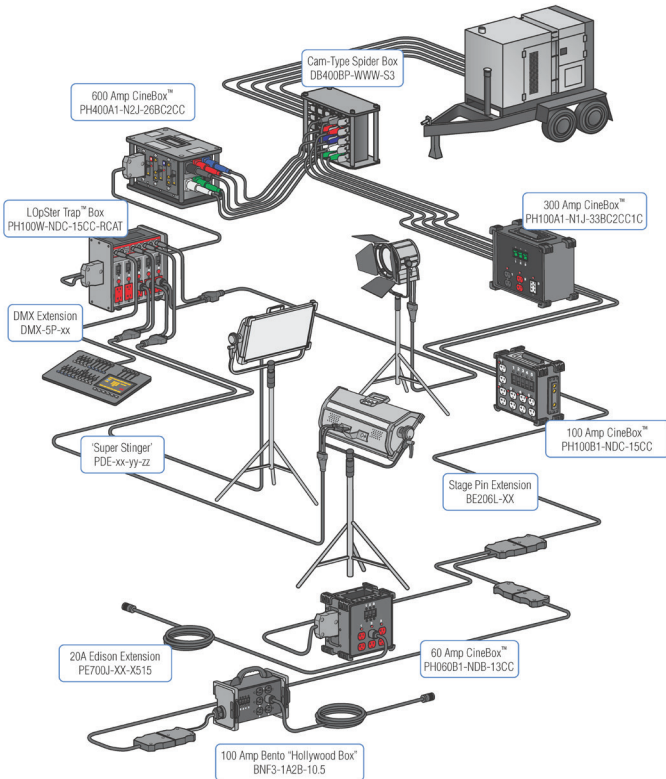

PowerRACK™ Power Distribution System

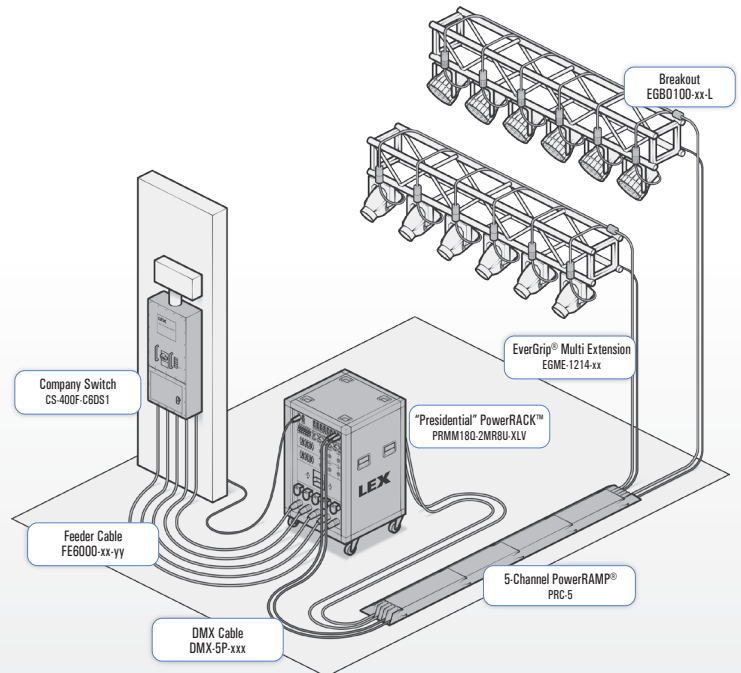

Lex East
11 Forest Parkway
Shelton, CT 06484
203.363.3738
203.363.3742 Fax

Lex West
12701 Van Nuys
Boulevard
Pacoima, CA 91331
818.768.4474
818.768.4040 Fax

Lex South
15751 SW 41 Street,
Suite 300
Davie, FL 33331
954.888.1024
954.888.1026 Fax

www.lexproducts.com
info@lexproducts.com
800.643.4460

© Copyright Lex Products 2024
Produced in the United States of America
05-30 All Rights Reserved.

Lex Products logo and lexproducts.com are trademarks or registered trademarks of Lex Products in the United States, other countries, or both.