
Overstock



orders@lexproducts.com 800.643.4460

We Deliver The Power



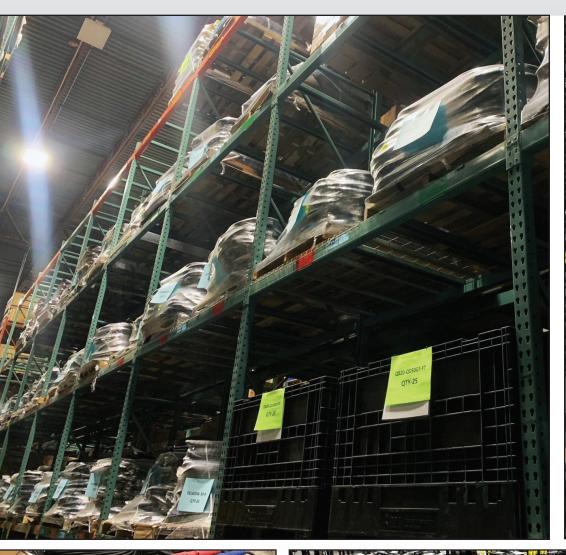







Image

Description

Spider Box Distribution System



T2-A2-6A1E

cULus Listed Temporary Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: 50A California Style (H,H,N,G)

Feed Thru: Yes

Output: (6) 5-20 Duplex Protected by Leviton GFCI Modules, (1) L6-30 Receptacle

Outputs Protected by Branch Circuit Breakers Rating: 50A, Single Phase (H, H, N, G), 125/250 VAC



DB200NP-A6S-S3

cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use)

Input: (5) 16 Series CAM Panel Mount

Feed Thru: No

Output: (6) California Style, 50A Single Phase (H,H,N,G)

Outputs Protected by Branch Circuit Breakers

Rating: 250A, Three Phase (H, H, H, N, G), 208Y/120 VAC



PE6/4L-50-CS63

Male Plug: (1) California Style CS63, 50 Amp, 3-pole, 4-wire, 125/250 VAC, inline locking device Female Connector: (1) California Style CS63, 50 Amp, 3-pole, 4-wire, 125/250 VAC, inline locking device

Cable Type: 6/4 SOOW

Length: 50 FT

Rating: 50 Amp, 125/250 VAC, 3-Pole, 4-Wire

Cam Splitter Distribution Box



DB400N1J4AJ-63-600Y

cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount, (BOYWG)

Feed Thru: No

Output: (4) Sets of (5) 16 Series CAM, 100A, Panel Mount (H,H,H,N,G)

Outputs Protected by Branch Circuit Breakers

Rating: 400 Amp, Three-phase (H,H,H,N,G), 600Y/347 VAC

Contact Lex Products: 800.643.4460 lexproducts.com



Image

Description

Quad Box Stringer Distribution System



DB100N1J5DM-13-SP

cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount

Feed Thru: No

Output: (5) L21-20 Twist Lock, 20A NEMA Receptacles
Outputs Protected by SINGLE POLE Branch Circuit Breakers for

Quad (QBS) Distribution

Rating: 100A, Three Phase (H, H, H, N, G), 208Y/120 VAC



PE105-50-L2120-WG-BLK

Male Plug: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC,

locking inline device, black

Female Connector: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC, locking inline device, black

Cable Type: 10/5 SOOW

Length: 50 FT

Rating: 20 Amp, 208 VAC, 3-Phase, 4-Pole, 5-Wire



PE125-50-L2120-WG

Male Plug: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC,

locking inline device, yellow

Female Connector: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC, locking inline device, yellow

Cable Type: 12/5 SOOW

Length: 50 FT

Rating: 20 Amp, 208 VAC, 3-Phase, 4-Pole, 5-Wire



DB20-QD50GF-FT

Male Plug: (1) NEMA L21-20 20 Amp, 4 Pole, 5 Wire, 120/208 VAC

Locking Wetguard Plug (Black)

Feed Thru: (1) NEMA L21-20, 20 Amp, 4 Pole, 5 Wire, 120/208 VAC

Locking Wetguard Connector (Black)

Output: (3) NEMA 5-20, 20 Amp Duplexes; (3) NEMA 5-20, 20 Amp GFCI Duplexes (Black Boxes)

Cable Type: 10/5 SOOW

Length: Overall 50 FT (15 FT, 15 FT, 15 FT, 5 FT)

Rating: 20 Amp, 3-Phase, 4-pole, 5-wire, 120/208Y VAC, 60 Hz



DB20-QD50G-3FW-BLK

Male Plug: (1) NEMA L21-20 20 Amp, 4 Pole, 5 Wire, 120/208 VAC

Locking Wetguard Plug (Yellow)

Feed Thru: (1) NEMA L21-20, 20 Amp, 4 Pole, 5 Wire, 120/208 VAC

Locking Wetguard Connector (Yellow)

Output: (3) NEMA 5-20, 20 Amp Duplexes; (3) NEMA 5-20, 20 Amp GFCI Duplexes (Yellow Boxes)

Cable Type: 12/5 SOOW

Length: Overall 50 FT (15 FT, 15 FT, 15 FT, 5 FT)

Rating: 20 Amp, 3-Phase, 4-pole, 5-wire, 120/208Y VAC, 60 Hz



Image

Description

PowerFLEX™ Feeder Cable



cULus Listed Feeder Cable

Male Plug: (1) 16 Series Cam-Type, Single Pole, Black Female Connector: (1) 16 Series Cam-Type, Single Pole, Black

Cable Type: 4/0 AWG Type W

Length: 50 FT

Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz

FEL600W-50-A



cULus Listed Feeder Cable

Male Plug: (5) 16 Series Cam-Type, Single Pole, Black Female Connector: (5) 16 Series Cam-Type, Single Pole, Black

Cable Type: #2 AWG Type SC, Banded

Length: 50 FT

Rating: 152 Amp, 600 VAC, 60 Hz

FBL305W-50

PowerFLEX™ 4/0 Type W Feeder Tails



cULus Listed Feeder Tail

Female Connector: (1) 16 Series Cam-Type, Single Pole, Black

Cable Type: 4/0 AWG Type W

Length: 5 FT

Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz

TLL60WF-5-A



cULus Listed Feeder Tail

Male Plug: (1) 16 Series Cam-Type, Single Pole, Black

Cable Type: 4/0 AWG Type W

Length: 5 FT

Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz

TLL60WM-5-A

Contact Lex Products: 800.643.4460 lexproducts.com



Contact Information:



Kenny Salzman National Account Manager Industrial


Phone: 203-402-9048

Email: KSalzman@lexproducts.com



John Nemanich Vice President of Sales Phone: 770-856-8814

Email: JNemanich@lexproducts.com

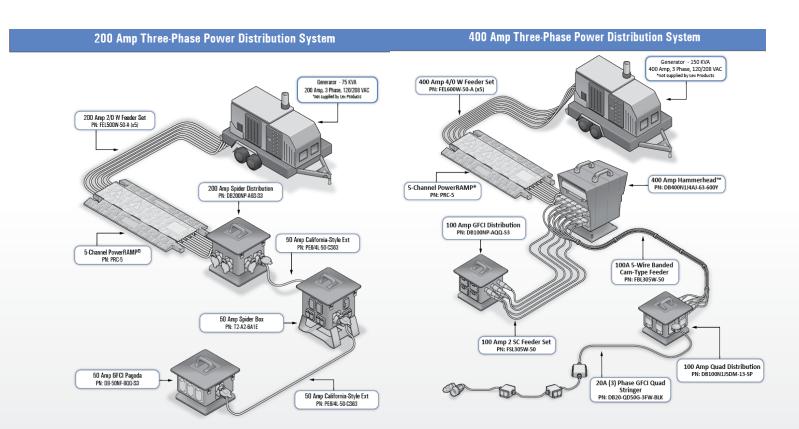

Lex East 11 Forest Parkway Shelton, CT 06484 203.363.3738 203.363.3742 Fax Lex West 12701 Van Nuys Boulevard Pacoima, CA 91331 818.768.4474 818.768.4040 Fax Lex South 15751 SW 41 Street, Suite 300 Davie, FL 33331 954.888.1024

954.888.1026 Fax

www.lexproducts.com info@lexproducts.com 800.643.4460 Copyright Lex Products 2024
Produced in the United States of America
05-30 All Rights Reserved.

Lex Products logo and lexproducts.com are trademarks or registered trademarks of Lex Products in the United States, other countries, or both.