

orders@lexproducts.com
800.643.4460

Suggested Product List

Outdoor Power Distribution Product Guide







Image	Part Number	Description
50A - 160A Portable PowerHOUSE™ Rubber Distribution		
	<p>T2-A2-6A1E</p> <p>For Pipe Hanging Verison: PH050Z3-NMW-26CC1DF</p>	<p>cULus Listed Temporary Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: 50A California Style (H,H,N,G) FeedThru: Yes Output: (6) 5-20 Duplex Protected by Leviton GFCI Modules, (1) L6-30 Receptacle Outputs Protected by Branch Circuit Breakers Rating: 50A, Single Phase (H, H, N, G), 125/250 VAC</p>
	<p>DB-50NF-BQQ-S3</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: 50A California Style (H,H,N,G) FeedThru: No Output: (6) NEMA 5-20 GFCI Duplex Receptacles Outputs Protected by Branch Circuit Breakers Rating: 50A, Single Phase (H, H, N, G), 125/250 VAC</p>
	<p>PH050B3-NLW-31CC1CS2CZ</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: 50A California Style (H,H,N,G) FeedThru: No Output: (1) 5-20 Duplex; (1) NEMA 14-50, 50A; (2) NEMATT30, 30A Receptacles Outputs Protected by Branch Circuit Rating: 50A, Single Phase (H, H, N, G), 125/250 VAC</p>
	<p>DB100NP-AQQ-S3</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: No Output: (12) NEMA 5-20 GFCI Duplex Receptacles Outputs Protected by Branch Circuit Breakers Rating: 100A, Three Phase (H, H, H, N, G), 208Y/120 VAC</p>

Image	Part Number	Description
100A - 160A Portable PowerHOUSE™ Rubber Distribution		
	DB100N1J5DM-13-SP	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount Feed Thru: No Output: (5) L21-20 Twist Lock, 20A NEMA Receptacles Outputs Protected by SINGLE POLE Branch Circuit Breakers for Quad (QBS) Distribution Rating: 100A, Three Phase (H, H, H, N, G), 208Y/120 VAC</p>
	DB100NP-AFF-S3	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount Feed Thru: No Output: (5) L21-20 Twist Lock, 20A NEMA Receptacles Outputs Protected by THREE POLE Branch Circuit Breakers Rating: 100A, Three Phase (H, H, H, N, G), 208Y/120 VAC</p>
	PH160A3-N1J-24CS2CZ	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount Feed Thru: No Output: (4) NEMA 14-50, 50A; (2) NEMATT30, 30A, Receptacles Outputs Protected by Branch Circuit Breakers Rating: 160A, Three Phase (H, H, H, N, G), 208Y/120 VAC</p>
200A Portable PowerHOUSE™ Rubber Distribution		
	DB200NQ-PTT-S3	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount Feed Thru: Yes Output: (21) NEMATT30, 30A, Receptacles Outputs Protected by Branch Circuit Breakers Rating: 210A, Three Phase (H, H, H, N, G), 208Y/120 VAC</p>


Image	Part Number	Description
200A - 250A Portable PowerHOUSE™ Rubber Distribution		
	DB200NP-A6S-S3	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: No Output: (6) California Style, 50A Single Phase (H,H,N,G) Outputs Protected by Branch Circuit Breakers Rating: 250A, Three Phase (H, H, H, N, G), 208Y/120VAC</p>
	PH200A3-N1J-16DW-T	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: No Output: (6) California Style, 50A Single Phase (H,H,N,G) Outputs Protected by Branch Circuit Breakers Base: Metal Legs Rating: 250A, Three Phase (H, H, H, N, G), 208Y/120VAC</p>
	DB200N1J10DM-63-2	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: No Output: (10) L21-20 Twist Lock, 20A, Receptacles Outputs Protected by SINGLE POLE Branch Circuit Breakers for Quad (QBS) Distribution Rating: 200A, Three Phase (H, H, H, N, G), 208Y/120VAC</p>
	DB200N1J10DM-63	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: No Output: (10) L21-20 Twist Lock, 20A, Receptacles Outputs Protected by Three Pole Branch Circuit Breakers Rating: 200A, Three Phase (H, H, H, N, G), 208Y/120VAC</p>


Image	Part Number	Description
400A Portable PowerHOUSE™ Rubber Distribution		
	PH400H3-N2J-1ADW-CW	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: Yes Output: (10) California Style, 50A Single Phase (H,H,N,G) Outputs Protected by Branch Circuit Breakers Base: (4) Casters Rating: 400A, Three Phase (H, H, H, N, G), 208Y/120VAC</p>
	DB400N1J2AJ-63-480V	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount FeedThru: No Output: (2) Sets of (5) 16 Series CAM, 200A, Panel Mount (H,H,H,N,G) Outputs Protected by Branch Circuit Breakers Rating: 400 Amp, Three-phase (H,H,H,N,G), 600Y/347VAC</p>
	DB400N1J4AJ-63-600Y	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (5) 16 Series CAM Panel Mount, (BOYWG) FeedThru: No Output: (4) Sets of (5) 16 Series CAM, 100A, Panel Mount (H,H,H,N,G) Outputs Protected by Branch Circuit Breakers Rating: 400 Amp, Three-phase (H,H,H,N,G), 600Y/347VAC</p>

Image	Part Number	Description
100A - 800A Load Master Adjustable Breaker Rubber PowerHOUSE™		
	DB250LP-AW-S3	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (1) Set of (5) 16 Series CAM Panel Mount, (BRBWG) Feed Thru: No Output: (1) Sets of (5) 16 Series CAM, 100A- 250A, Panel Mount (H,H,H,N,G) Outputs Protected by Branch Circuit Breakers Rating: 100-250 Amp, Three-phase (H,H,H,N,G), 4-pole, 5-wire, 600Y/347 VAC, 60 Hz</p>
	DB400LP-AW-S3	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (1) Set of (5) 16 Series CAM Panel Mount, (BRBWG) Feed Thru: No Output: (1) Sets of (5) 16 Series CAM, 160A- 400A, Panel Mount (H,H,H,N,G) Outputs Protected by Branch Circuit Breakers Rating: 160-400 Amp, Three-phase (H,H,H,N,G), 4-pole, 5-wire, 600Y/347 VAC, 60 Hz</p>
	PH800G3-N1J-11AT	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) Feed Thru: No Output: (2) Sets of (5) 16 Series CAM, 320A- 800A, Panel Mount (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 600 Amp, Three-Phase (H,H,H,N,G), 600Y/347 VAC</p>

Image	Part Number	Description
600A - 800A Load Master Adjustable Breakers PowerHOUSE™		
	<p>PH600G3-N1J-14AV</p> <p>Add-BBB for Black, Black, Black CAMs</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) Feed Thru: No Output: (4) Sets of (5) 16 Series CAM, 60A - 150A, Panel Mount (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 600 Amp, Three-Phase (H,H,H,N,G), 600Y/347 VAC</p>
	<p>PH800G3-N2J-21AX2AZ-C</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) Feed Thru: Yes Output: (1) Set of (5) 16 Series CAM, 100A - 250A, Panel Mount(H,H,H,N,G) (2) Set or (5) 16 Series CAM, 160A - 400A, Panel Mount (H,H,H,N,G) Base: (4) Casters Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 800A, Three Phase (H, H, H, N, G), 600Y/347 VAC</p>
	<p>PH800G3-N2J-31AV1AX1AZ</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) Feed Thru: Yes Output: (1) Set of (5) 16 Series CAM, 60A - 150A, Panel Mount (H,H,H,N,G) (1) Set of (5) 16 Series CAM, 100A - 250A, Panel Mount (H,H,H,N,G) (1) Set or (5) 16 Series CAM, 160A - 400A, Panel Mount (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 800A, Three Phase (H, H, H, N, G), 600Y/347 VAC</p>



Image	Part Number	Description
800A Load Master Adjustable Breaker Outdoor PowerRACK™		
	<p>PH800P3-N1J-22AX4AJ</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) FeedThru: No Output: (4) Sets of (5) 16 Series CAM, 100A- 250A, Panel Mount, (H,H,H,N,G) (2) Sets of (5) 16 Series CAM, 160A- 400A, Panel Mount, (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 800 Amp, Three-Phase (H,H,H,N,G), 600Y/347 VAC</p>
	<p>PH800W3-N2J-33CC2AV2AX</p> <p>**For 600Y/347 VAC rated version use configuration without duplexes: PH800W3-N2J-22AV2AX</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) FeedThru: Yes Output: (3) NEMA Straight Blade, 5-20, 20A, (H,N,G), 125 VAC (2) Sets of (5) 16 Series CAM, 60A- 150A, Panel Mount, (H,H,H,N,G) (2) Sets of (5) 16 Series CAM, 100A- 250A, Panel Mount, (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 800 Amp, Three-Phase (H,H,H,N,G), 208Y/120 VAC</p>





Image	Part Number	Description
800A Load Master Adjustable Breaker Outdoor PowerRACK™		
	<p>PH800W3-N1J-33CC3DW3AV</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BRBWG) FeedThru: No Output: (3) NEMA Straight Blade, 5-20, 20A, (H,N,G), 125 VAC (3) California Style, 50A Single Phase (H,H,N,G) (3) Sets of (5) 16 Series CAM, 100A- 250A, Panel Mount, (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 800 Amp, Three-Phase (H,H,H,N,G), 208Y/120 VAC</p>
	<p>PH800W3-N1J-31AV1AX1AY</p>	<p>cULus Listed Portable Power Distribution Unit Environmental Rating: Type 3R (Outdoor Use) Input: (2) sets of (5) 16 Series CAM Panel Mount, (BOYWG) FeedThru: No Output: (1) Sets of (5) 16 Series CAM, 60A- 150A, Panel Mount, (H,H,H,N,G) (1) Sets of (5) 16 Series CAM, 100A- 250A, Panel Mount, (H,H,H,N,G) (1) Sets of (5) 16 Series CAM, 240A- 600A, Panel Mount, (H,H,H,N,G) Outputs Protected by Electronic Adjustable Branch Circuit Breakers Rating: 800 Amp, Three-Phase (H,H,H,N,G), 600Y/347 VAC</p>

Image	Part Number	Description
PowerFLEX™ 4/0 and 2/0 Type W Feeder Cable		
	FEL600W-50-A	<p>cULus Listed Feeder Cable Male Plug: (1) 16 Series Cam-Type, Single Pole, Black Female Connector: (1) 16 Series Cam-Type, Single Pole, Black Cable Type: 4/0 AWG Type W Length: 50 FT Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz</p>
	FEL500W-50-A	<p>cULus Listed Feeder Cable Male Plug: (1) 16 Series Cam-Type, Single Pole, Black Female Connector: (1) 16 Series Cam-Type, Single Pole, Black Cable Type: 2/0 AWG Type W Length: 50 FT Rating: 200 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz</p>
PowerFLEX™ 4/0 Type W Feeder Tails		
	TLL60WF-5-A	<p>cULus Listed Feeder Tail Female Connector: (1) 16 Series Cam-Type, Single Pole, Black Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz Cable Type: 4/0 AWG Type W</p>
	TLL60WF-10-A	<p>Length: -5 = 5 FT -10 = 10 FT</p>
	TLL60WM-5-A	<p>cULus Listed Feeder Tail Male Plug: (1) 16 Series Cam-Type, Single Pole, Black Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz Cable Type: 4/0 AWG Type W</p>
	TLL60WM-10-A	<p>Length: -5 = 5 FT -10 = 10 FT</p>

Image	Part Number	Description
PowerFLEX™ #2 Type SC Feeder Cable Tails		
	FBL305W-50	<p>cULus Listed Feeder Cable Male Plug: (5) 16 Series Cam-Type, Single Pole, Black Female Connector: (5) 16 Series Cam-Type, Single Pole, Black CableType: #2 AWG Type SC, Banded Length: 50 FT Rating: 152 Amp, 600 VAC, 60 Hz</p>
	TL300F-10-X	<p>cULus Listed Feeder Tail Female Connector: (1) 16 Series Cam-Type, Single Pole, Black CableType: #2 AWG Type SC Length: 10 FT Rating: 100 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz</p> <p>CAM Color (replace x in part number): BLK-A, WHT-B, RED-C, BLU-D, GRN-E</p>
	TL300M-10-X	<p>cULus Listed Feeder Tail Male Plug: (1) 16 Series Cam-Type, Single Pole, Black CableType: #2 AWG Type SC Length: 10 FT Rating: 100 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz</p> <p>CAM Color (replace x in part number): BLK-A, WHT-B, RED-C, BLU-D, GRN-E</p>
PowerFLEX™ 400A Molded Cam-Type Splitter		
	SS6000-C-A	<p>Male Plug: (1) 16 Series Cam-Type, Single Pole, Black Female Connector: (2) 16 Series Cam-Type, Single Pole, Black CableType: 4/0 AWG Type SC Length: 4 FT Rating: 400 Amp, Single-pole, Single-wire, 600 VAC, 60 Hz</p>

Image	Part Number	Description
PowerFLEX™ 6/4 SOOW 50 AMP Spider Box Cable		
	PE6/4L-50-CS63 Leviton Devices	Male Plug: (1) California Style CS63, 50 Amp, 3-pole, 4-wire, 125/250 VAC, inline locking device Female Connector: (1) California Style CS63, 50 Amp, 3-pole, 4-wire, 125/250 VAC, inline locking device CableType: 6/4 SOOW Length: 50 FT Rating: 50 Amp, 125/250 VAC, 3-Pole, 4-Wire
	PE6/4-50-CS63 Hubbell Devices	
PowerFLEX™ 6/4 SOOW 50 AMP RV Adaptor Cable		
	ADP-CS63-1450-2	Male Plug: (1) California Style CS63, 50 Amp, 3-pole, 4-wire, 125/250 VAC, inline locking device Female Connector: (1) 14-50, 50 Amp, 3-pole, 4-wire, 125/250 VAC, inline straight blade device, yellow CableType: 6/4 SOOW Length: 2 FT Rating: 50 Amp, 125/250 VAC, 3-Pole, 4-Wire
PowerFLEX™ L21-20 Extension Cable		
	PE105-50-L2120-WG-BLK	Male Plug: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC, inline locking device, black Female Connector: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC, inline locking device, black CableType: 10/5 SOOW Length: 50 FT Rating: 20 Amp, 208 VAC, 3-Phase, 4-Pole, 5-Wire
	PE125-50-L2120-WG	Male Plug: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC, inline locking device, yellow Female Connector: (1) NEMA L21-20, 20 Amp, 4-pole, 5-wire, 120/208Y VAC, inline locking device, yellow CableType: 12/5 SOOW Length: 50 FT Rating: 20 Amp, 208 VAC, 3-Phase, 4-Pole, 5-Wire

Image	Part Number	Description
PowerFLEX™ Quad Stringer		

	<p>DB20-QD50G-3FW-BLK</p>	<p>Male Plug: (1) NEMA L21-20 20 Amp, 4 Pole, 5 Wire, 120/208 VAC Locking Wetguard Plug (Black) Feed Thru: (1) NEMA L21-20, 20 Amp, 4 Pole, 5 Wire, 120/208 VAC Locking Wetguard Connector (Black) Output: (3) NEMA 5-20, 20 Amp Duplexes; (3) NEMA 5-20, 20 Amp GFCI Duplexes (Black Boxes) Cable Type: 10/5 SOOW Length: Overall 50 FT (15 FT, 15 FT, 15 FT, 5 FT) Rating: 20 Amp, 3-Phase, 4-pole, 5-wire, 120/208YVAC, 60 Hz</p>
	<p>DB20-QD50GF-FT</p>	<p>Male Plug: (1) NEMA L21-20 20 Amp, 4 Pole, 5 Wire, 120/208 VAC Locking Wetguard Plug (Yellow) Feed Thru: (1) NEMA L21-20, 20 Amp, 4 Pole, 5 Wire, 120/208 VAC Locking Wetguard Connector (Yellow) Output: (3) NEMA 5-20, 20 Amp Duplexes; (3) NEMA 5-20, 20 Amp GFCI Duplexes (Yellow Boxes) Cable Type: 12/5 SOOW Length: Overall 50 FT (15 FT, 15 FT, 15 FT, 5 FT) Rating: 20 Amp, 3-Phase, 4-pole, 5-wire, 120/208YVAC, 60 Hz</p>

Shipping Storage		
	<p>DGR454834SBN-2</p>	<p>Collapsible Shipping Storage Container Material: Non-reactive plastic exterior Dimensions: 45 x 48 x 34 Interior Dimensions: 41 x 44 x 27 Collapsed Height: 14 in. Weight Capacity: 1500 lbs. Product Weight: 145 lbs. (empty)</p>
	<p>HL4548-N</p>	<p>Container Lid Material: High Density Polyethylene Dimensions: 45.5 x 48.5 x 3.7</p>

Image Part Number Description

PowerRAMP® Cable Ramps 5 Channel



PRC-5 (with Lex logo)

5 Channel Cable Protector

Base: Black

Lid: Blue

Dimensions: L 36 IN x W 19.75 IN x H 2 IN

Load Capacity PerTire / Axel: 16,300 lbs. PerTire / 32,600 lbs. Per Axle at 70°F



Generator KVA Rating to Amperage Conversion Chart

80% Power Factor

kV•A	kW	208V	220V	240V	380V	440V	480V	600V	2400V	3300V	4160V
6.3	5	17.5	16.5	15.2	9.6	8.3	7.6	6.1			
9.4	7.5	26.1	24.7	22.6	14.3	12.3	11.3	9.1			
12.5	10	34.7	33	30.1	19.2	16.6	15.1	12			
18.7	15	52	49.5	45	28.8	24.9	22.5	18			
25	20	69.5	66	60.2	38.4	33.2	30.1	24	6	4.4	3.5
31.3	25	87	82.5	75.5	48	41.5	37.8	30	7.5	5.5	4.4
37.5	30	104	99	90.3	57.6	49.8	45.2	36	9.1	6.6	5.2
50	40	139	132	120	77	66.5	60	48	12.1	8.8	7
62.5	50	173	165	152	96	83	76	61	15.1	10.9	8.7
75	60	208	198	181	115	99.5	91	72	18.1	13.1	10.5
93.8	75	261	247	226	143	123	113	90	22.6	16.4	13
100	80	278	264	240	154	133	120	96	24.1	17.6	13.9
125	100	347	330	301	192	166	150	120	30	21.8	17.5
156	125	433	413	375	240	208	188	150	38	27.3	22
187	150	520	495	450	288	249	225	180	45	33	26
219	175	608	577	527	335	289	264	211	53	38	31
250	200	694	660	601	384	332	301	241	60	44	35
312	250	866	825	751	480	415	376	300	75	55	43
375	300	1040	990	903	576	498	451	361	90	66	52
438	350	1220	1155	1053	672	581	527	422	105	77	61
500	400	1390	1320	1203	770	665	602	481	120	88	69
625	500	1735	1650	1504	960	830	752	602	150	109	87
750	600	2080	1980	1803	1150	996	902	721	180	131	104
875	700	2430	2310	2104	1344	1274	1052	842	210	153	121
1000	800	2780	2640	2405	1540	1330	1203	962	241	176	139
1125	900	3120	2970	2709	1730	1495	1354	1082	271	197	156
1250	1000	3470	3300	3009	1920	1660	1504	1202	301	218	174
1563	1250	4350	4130	3740	2400	2080	1885	1503	376	273	218
1875	1500	5205	4950	4520	2880	2490	2260	1805	452	327	261
2188	1750			5280	3350	2890	2640	2106	528	380	304
2500	2000			6020	3840	3320	3015	2405	602	436	348
2812	2250			6780	4320	3735	3400	2710	678	491	392
3125	2500			7520	4800	4160	3740	3005	752	546	435
3750	3000			9040	5760	4980	4525	3610	904	654	522
4375	3500			10550	6700	5780	5285	4220	1055	760	610
5000	4000			12040	7680	6640	6035	4810	1204	872	695



200 Amp 3-Phase Power Distribution System

400 Amp 3-Phase Power Distribution System

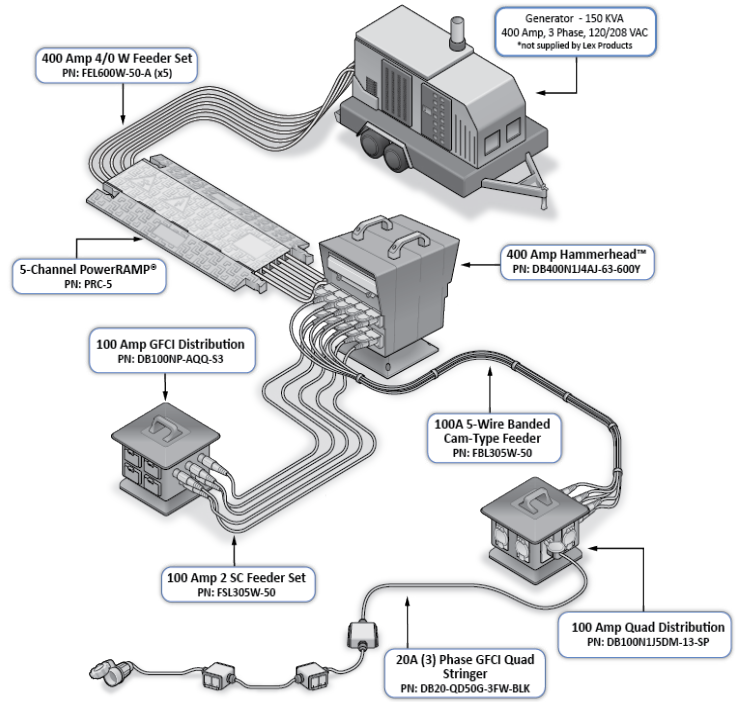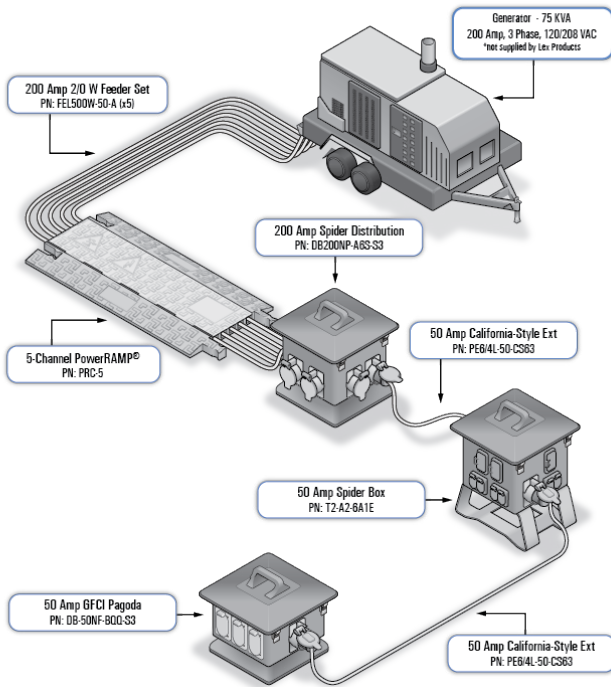

RV / Trailer Power Distribution System

Temporary Shelter Power Distribution System

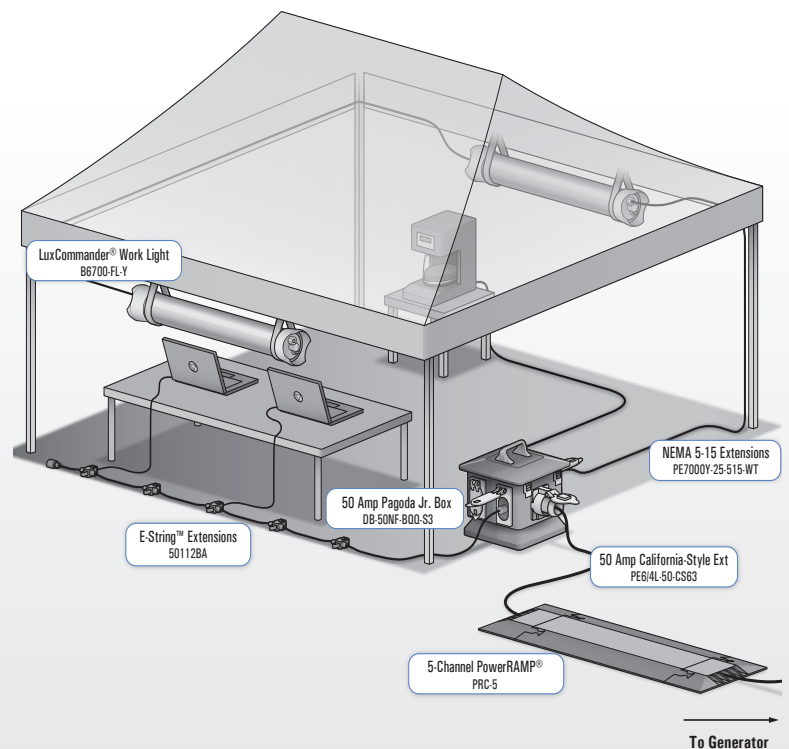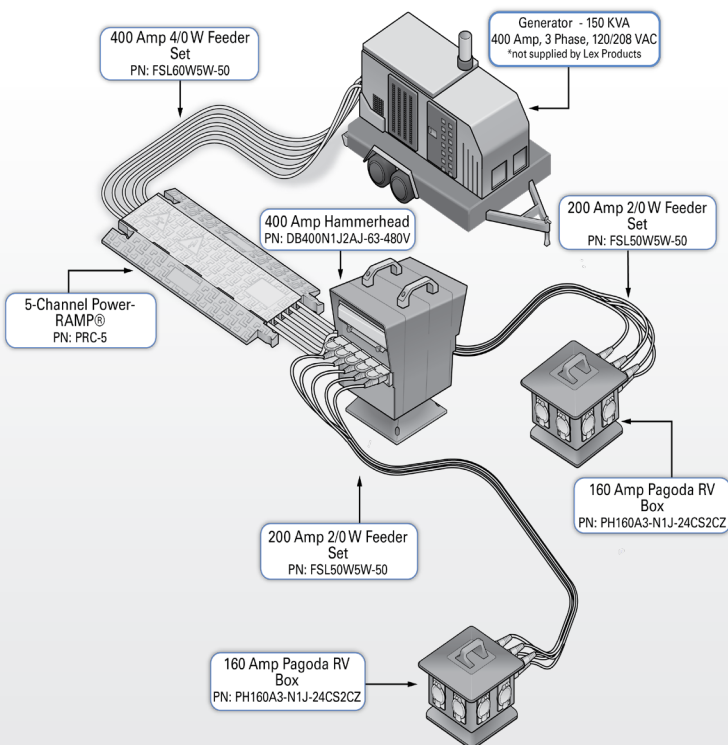

Contact LEX:



John Nemanich
Vice President of Sales
Phone: 770-856-8814
Email: JNemanich@lexproducts.com

Lex Products is a leading North American manufacturer of innovative power distribution and emerging energy storage solutions for demanding markets, including entertainment, industrial and the military.

Founded in 1989, the company specializes in products designed to withstand rough use and harsh environments. Headquartered in Connecticut, the company also has manufacturing and stocking facilities in California, Florida and Scotland.

ISO 9001:2015 Certified
AS 9001:2016 Rev. D Certified



Kenny Salzman
National Account Manager
Industrial- USA
Phone: 203-402-9048
Email: KSalzman@lexproducts.com



Mike Reilly
National Account Manager
Entertainment & Theatrical
Northeast & Southern USA
Phone: 203-998-1067
Email: MReilly@lexproducts.com



Mark Hovis
National Account Manager
Studio & Theatrical Entertainment
Western USA
Phone: 707-791-0596
Email: MHovis@lexproducts.com